


A photograph of a mechanical device, possibly a clock or timer, with a cylindrical body and a complex internal mechanism visible through a transparent section. The device has a label with the text "FIVRE FIVRE" and a circular logo.

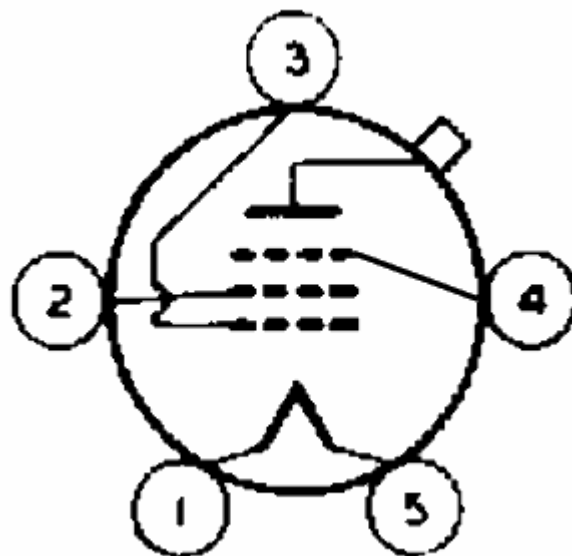

TIPO	ACCENSIONE		1) Catodo	2) μ	μ_{1-2}	S mA/V	3) CAPACITÀ INTERELETTRODICA			Dimensioni fig.	Placca Volt mass. c. c.	Scher- mo Volt mass. c. c.
	Volt	Amp.					Cgp	Cgl	Cpf			
5 C 15	4	1.05	f. o.	230	4.8	2.8	0.02	13.5	10	8	600	200

Dissipaz. placca mass. Watt	Dissip.scher.mass.w	4) Servizio	Placca Volt c. c.	Scher- mo Volt c. c.	Griglia Volt c. c.	Placca mAmp. C. C.	Poten- za eccitaz. Watt	Poten- za utile Watt	OSSERVAZIONI	
15	3	C tg. C ff.	600 500	0 0	200 200	- 100 - 140	60 50	1 1	24 16.5	Modulare anche sullo schermo

Ig2 = 10mA a 300v

